### WARRANTY

Bowmar/ALI, Inc. warrants to the purchaser of this new Bowmar Calculator that if the machine or any part thereof in the judgment of Bowmar is proven to be defective in material or workmanship within one year from date of original purchase, such defects will be repaired or replaced (at the Company's option) free of charge for parts and labor.

This warranty does not apply to any product which has been damaged by accident or which has been misused, abused, altered, or repaired by anyone other than Bowmar.


This warranty is in lieu of all other warranties expressed or implied, and no person is authorized to assume for Bowmar any other liability in connection with the sale of this product.

To obtain repairs, the Calculator should be delivered, prepaid, to Bowmar/ALI, Inc. at address shown below. In-warranty units will be returned postage prepaid.

> BOWMAR/ALI, INC. 531 MAIN STREET ACTON, MASS. 01720

MODEL 90512

1000

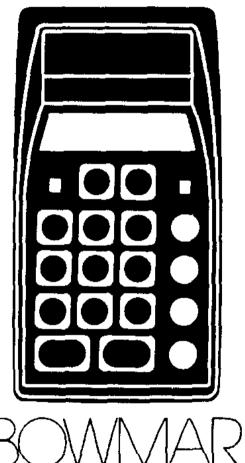

## INTRODUCTION

Your calculator is light enough and small enough to be used in one hand, but it provides a standard keyboard and a light emitting diode (LED) display that is easily read at home or in the office.

The eight digit display and the full floating decimal allow the calculation of any problem without sacrificing accuracy.

Whether you want to solve engineering or budget problems, your calculator has the ability with features such as clear entry, automatic squaring, and a manual constant register that will perform integer powers, reciprocals and fractions as well as chain and mixed calculations.

The battery will recharge in seven hours and operate the calculator for three, but with the charger/power supply no useful time will be lost since it operates the calculator while charging it.

We suggest that this programmed Instruction Manual be read with the calculator in hand. Performing the operations as you read them will increase your familiarity with them. For a quick reference, an outline of operations is on the back of the calculator.

## **OPERATION**

## AC Operation:

Connect the Charger unit to any standard 120 Volt electrical outlet and plug the connector into the Calculator. After the above connections, the power switch may be turned on and operation started. (While connected to AC, the internal batteries are automatically charged whether the power switch is "ON" or "OFF".)

## Battery Operation:

Disconnect the Charger cord and turn the power switch "ON". With normal use a full battery charge can be expected to supply about 3 hours of working time.


NOTE: When the low battery indicator (L) on the display is lighted, do not continue battery operation. This indicates need for a battery charge.

## Battery Charging:

Simply follow the same procedure as in AC operation. The Calculator may be used during the charge period if desired. In order to fully charge a battery which has been completely discharged, 7 hours is required. In most cases, an overnight charge should be adequate if the batteries have not been fully discharged.

NOTE: Although no damage will result from prolonged periods with the Charger connected, it is advisable to remove the Charger cord when the Calculator is not in use after a full recharge cycle.

**CAUTION:** To avoid possible damage, use only the charger provided with the calculator.

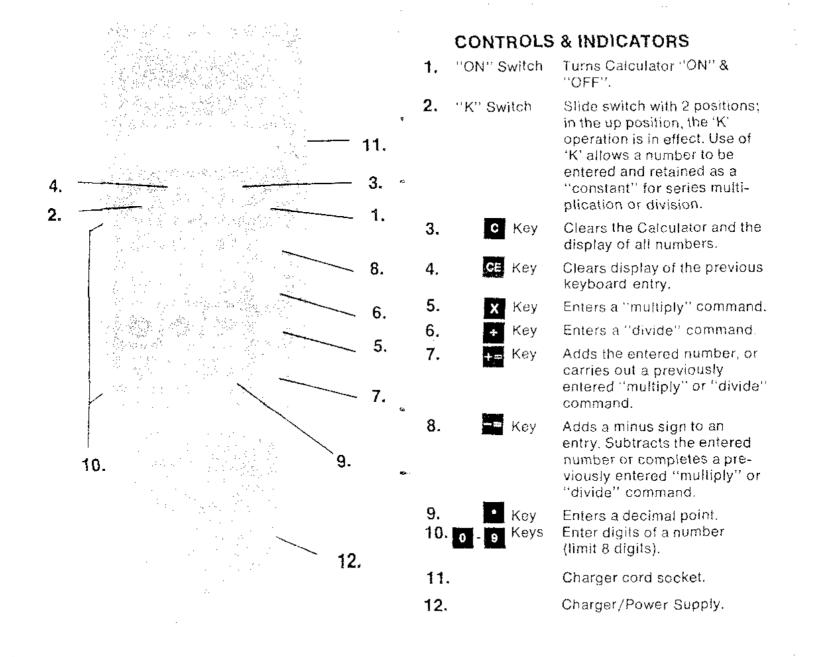

Overflow Indicator Indicates a calculation result that contains more than eight

digits.

Appears as

Low Battery Indicator

Warns of need for battery charge during battery

operation. Appears as

Minus Sign Indicator

Activated by the see key for operations with negative

numbers. Appears as

Indicator

Decimal Point Automatically appears to the right of any number entered, unless inserted in another sequence by use of the Decimal key. With fractional numbers, it will be preceded

by a zero.

Error Indicator Indicates an entry of more

than 8 digits.

Appears as

### **BATTERY NOTES**

- 1. With normal use at room temperature, a full battery charge can be expected to supply about 3 hours of accumulated working time.
- 2. The Calculator may be used while its battery is charaina.
- 3. Batteries that have been neither used nor charged for as long as 2 or 3 months will suffer substantial loss of operating time through a tendency to self-discharge. As a general rule, batteries lose about 1% charge per day due to self-discharge, at normal temperatures.
- 4. For optimum performance and long life:
  - a. Alternate frequently between Battery and AC power.
  - b. Operate at or near normal room temperatures.
  - c. Charge as soon as possible upon appearance of the Low-Battery indicator.
- 5. Recharge time is 7 hours for a fully discharged battery.
- 6. The Low-Battery indicator is designed to appear as soon as battery voltage drops to the lowest value that will support optimum performance of the Calculator. Should further discharge occur, through continued operations or self-discharge. the Low-Battery indicator may fail to appear. Do not continue to operate on batteries when this condition is noted, or a damaged battery may result.
- 7. As a general rule, if improper operation occurs, first try the Calculator with its charger connected. If operation is then normal, this indicates the batteries are low.
- 8. Do not store the unit in high temperature areas such as the top of radiators or the rear deck of automobiles exposed to the sun. The Calculator will operate satisfactorily over an ambient temperature range of 0 to 50C (32 to 122F) and relative humidity to 95%.

## **CALCULATIONS**

# 1. ADDITION

d. Enter 9.83

Example #1: To calculate 16.39 + 9.83 =Do these steps display will be

- a. Touch C
- 16:39 b. Enter 16.39
- 16.39: c. Touch +=

9.83

26.22 e. Touch += Answer

Example #2: To calculate 16 + 9 + 8.3 + 4.1 =Do these steps display will be

- 0. a. Touch C
- b. Enter 16 16.
- 16. c. Touch +=
- d. Enter 9
- *25*. e. Touch +=
- 8.3 f. Enter 8.3
- 33.3 g. Touch +=
- 4.1 h. Enter 4.1
- 37.4 i. Touch += Answer

# 2. SUBTRACTION

Example #1: To calculate 12.81 - 3.6 =Do these steps display will be

- a. Touch c 0.
- 12.81 b. Enter 12.81
- 12.81 c. Touch +=
- 3.6 d. Enter 3.6 e. Touch -= 9.21 Answer
- Example #2: To calculate 23 6 + 2.1 5 =Do these steps display will be
- 0. a. Touch C.
- b. Enter 23 23.
- 23. c. Touch += d. Enter 6 6.
- e. Touch --*17*. 2.1 f. Enter 2.1
- 19.1 g. Touch += 5.
- 14.1 i. Touch -= Answer

h. Enter 5

Example #3: To calculate 62: Do these steps	- 82 <del>+</del> 10	— <b>40</b> — display will be
a. Touch c		0.
b. Enter 62		62.
c. Touch		62,
d. Enter 82		82.
e. Touch -=		<b>— 20</b> .
f. Enter 10		10.
g. Touch +=		<b>—</b> 10.
h. Enter 40		40.
i. Touch	Answer	50.
3. MULTIPLI		
Example #1: To Do these steps	calculate :	<b>29.32 x 56.5</b> = display will be
a. Touch C		0.
b. Enter 29.32		29.32
c. Touch X		29.32
d. Enter 56.5		56.5
e. Touch +=	Answer	1656.58

•	
Example #2: To Do these steps	calculate 3 x 21 x 6.1 = display will be
a. Touch 🥳	* O.
b. Enter 3	APPLICATION
c. Touch 🗴	3.
d. Enter 21	21.
e. Touch X	63.
f. Enter 6.1	÷ · 6.1
g. Touch +=	Answer 384.3
Example #3: To Use of 'K' S	witch 31 x 8.2 = 31 x 7.6 =
Do these steps	display will be
a. Touch C	0.
b. Push 'K' on (i	up)
c. Enter 31	31.
d. Touch X	31.
e. Enter 6	6.
f. Touch += 1s	st Answer 186.
g. Enter 8,2	. 8.2

h. Touch += 2nd Answer 254.2	e. Touch
i. Enter 7.6	f. Enter 9
j. Touch += 3rd Answer 235.6	g. Touch 🗺 Answer 🤼 3.
k. Push 'K' off (down)	Example #3: To calculate 181 ÷ 15 = Use of 'K' switch 96 ÷ 15 =
4. DIVISION Example #1: To calculate 376 ÷ 53 =	$117 \div 15 =$ Do these steps display will be
Do these steps display will be	a. Touch C
a. Touch C	b. Push 'K' on (up)
b. Enter 376.	c. Enter 181 181.
c. Touch # 376.	d. Touch ÷ 181.
d. Enter 53 53.	e. Enter 15
e. Touch += Answer 7.0943396	f. Touch 1 1st Answer 12.066666
Example #2: To calculate 81 ÷ 3 ÷ 9 == Do these steps display will be	g. Enter 96
a. Touch c 0.	h. Touch 1 2nd Answer 6.4
b. Enter 81 81.	i. Enter 117 117.
c. Touch ÷	j. Touch += 3rd Answer 7.8
d. Enter 3 3.	k. Push 'K' off (down)

and the second was the second second

## 5. MIXED ARITHMETIC

Example #1: To calculate  $2.7 \times (-4) + (-6) = 0$  these steps display will be

- a. Touch C.
- 23.
- c. Touch X

h. Enter 23

23.

d. Enter 4

4

e. Touch

<del>--</del> 92.

f. Touch 🚓

**— 92**.

g. Enter 6

- 6
- h. Touch Answer
- 15.333333

# Example #2: To calculate

$$\frac{(9+6-5)\times 8}{20}-8=$$

5.5

Do these steps

display will be

a. Touch C

0.

b. Enter 9

9.

c. Touch +=

9.

d. Enter 6

\_\_\_\_6

e. Touch +=

15.

f. Enter 5

5.

g. Touch --

- h. Touch X
- i. Enter 8
- J. Touch + 80°
- k. Enter 20 20.
- I. Touch += 4.
- m. Enter 8
- n, Touch -- Answer -- 4.

# 6. EXPONENTS

b. Push 'K' on (up)

Example #1: To calculate (3)5 =

Do these steps

display will be

- a. Touch C

- c. Enter 3

e. Enter 3

d. Touch X

- f. Touch +=

...

g. Touch +=

27.

h. Touch +=

81.

3.

i. Touch +=

Answer

243.

j. Push 'K' off (down)

## 7. OVERFLOW INTERPRETATION

The overflow indicator "
"" will appear when the display capacity of the Calculator is exceeded.

For example, multiplication of  $12345678 \times 345678$  will give the following display

[] 42676.292

The "
" symbol indicates "overflow", or an answer of more than the 8 digits shown. To obtain the correct decimal location, simply record the displayed number and move the decimal point 8 places to the right. The real answer will then be:

4,267,629,200,000.

This procedure applies to all operations, multiplication, division, addition and subtraction. Use the 'C' key to clear the overflow.

## **SPECIFICATIONS**

Decimal Point: Full floating decimal point.

Capacity: Addition, subtraction, multiplica-

tion, division and K register: 8 digits in /16 digits out with underflow.

Functions: General add, subtract, multiply and

divide. Chain multiplication and division. Mixed arithmetic. Constant multiplication and division. Exponents, fractions, reciprocals.

nents, fractions, reciprocals.

Power: A.C. operation—110/120V, 60 Hz.

Battery operation-NiCd Batteries (3)

3 hour operation 7 hour charge.

Main Elements: Large scale integrated circuit.

Supplementary

Elements: Mos ICs, Transistors, Diodes.

Dimensions: Height 11/4", Width 3", Depth 53/4".

Weight: 9 oz.

Peripherals: Charger/Power Supply, Vinyl

Pouch, Programmed Instruction

Book.