
# HAND-HELD CALCULATOR

AUTOMATIC CONSTANT
SIX FUNCTIONS
FLOATING DECIMAL

## CONTENTS

Identification of Switches	3	Subtraction	6
	3	Multiplication	6
		Division	7
Calculator Operation	4	Mixed Calculations	7
		Square Root	8
Numeric Keys and Decimal Point	4	Reciprocal	8
Clearing Keys	4.	Percentage	9
Operation Keys	4	Constant	10
Numeric and Symbol Display	5	Powers	13
		Clearing	13
Floating Decimal	5	Overflow	14
Reciprocals	5		
Powers	5		
		Maintenance	15
Calculator Examples	6		
Addition	6	Glossary	15

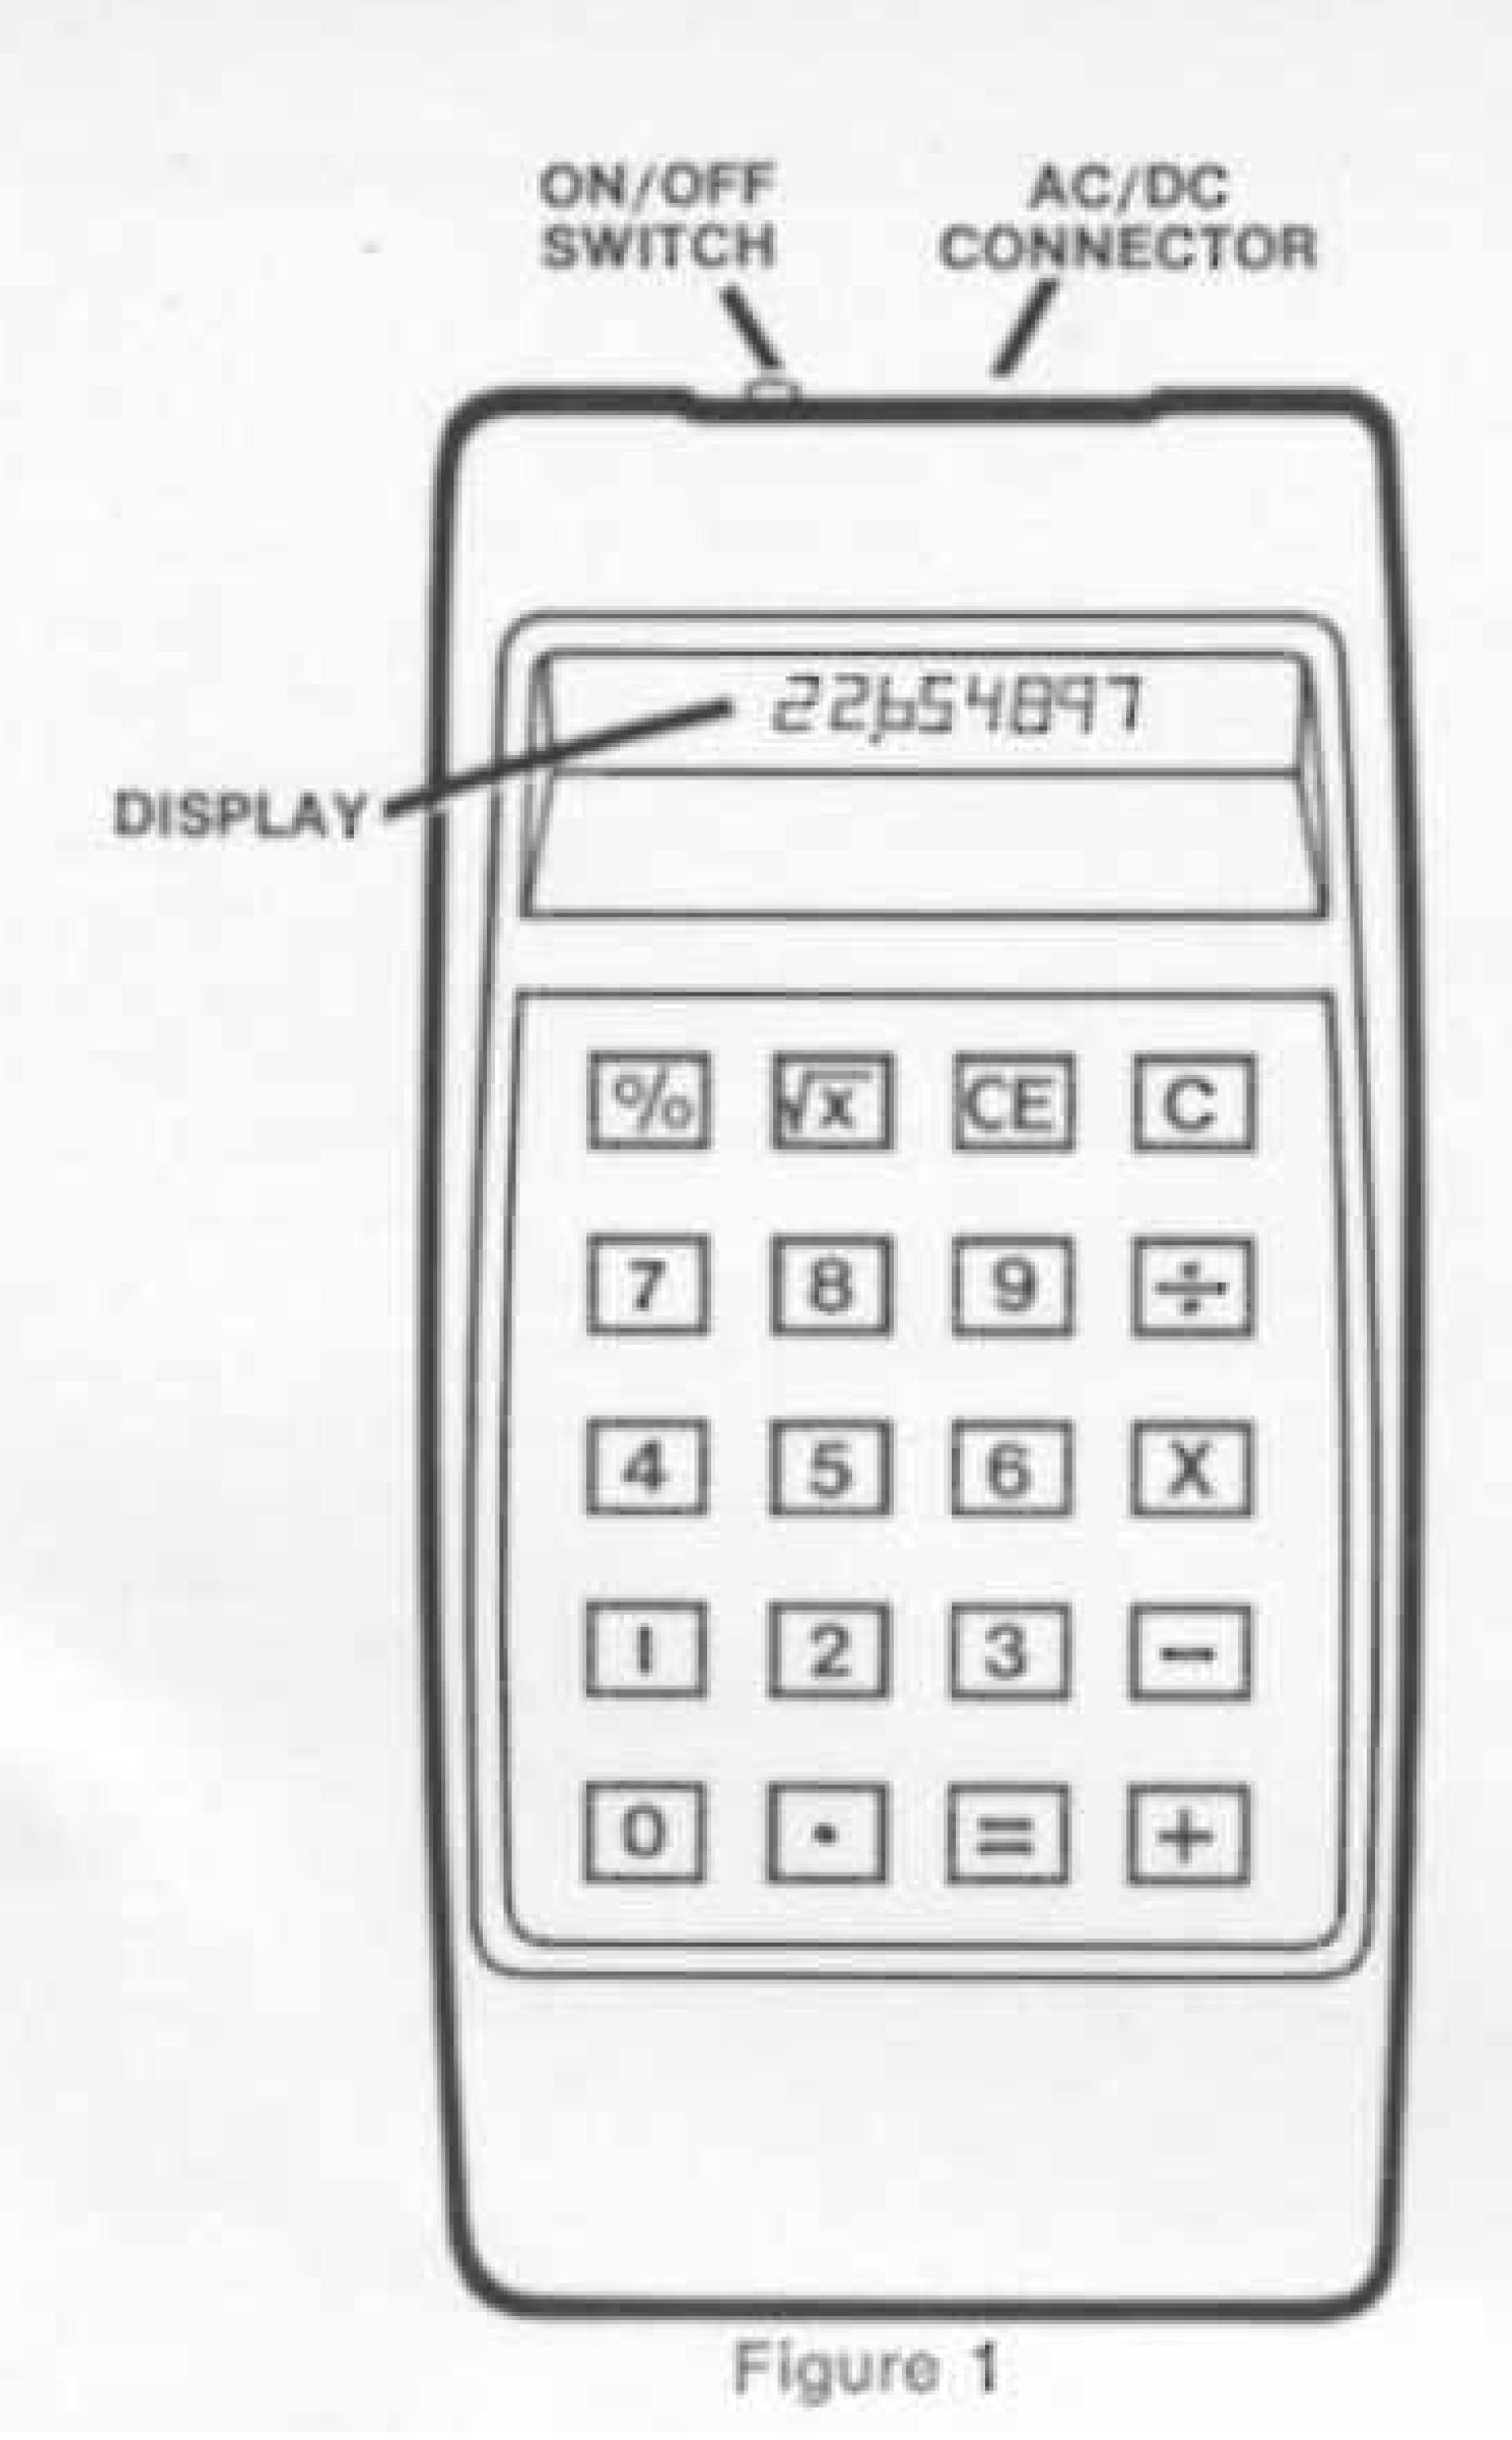

#### 8-DIGIT MULTI-FUNCTION CALCULATOR

Today's most advanced MOS "calculator-on-achip" integrated circuitry provides instant addition, subtraction, multiplication, square root, percentages and division.

- Automatic constant operations with all functions
- = Six functions  $(+, -, \times, +, \%, \sqrt{\chi})$
- m Floating decimal
- = Enter problems the way you write them
- m True credit balance
- Mixed calculations
- E LED display: 8 digits and sign
- Unique positive-touch keyboard
- Small and lightweight
- **Battery-operated**
- Low power consumption for longer battery life
- m Optional AC adaptor

#### CALCULATOR OPERATION

#### ON-OFF SWITCH

The On-Off switch is located on the top end of the calculator case (see Figure 1).

#### NUMERIC KEYS

0 - 9 These keys are used to enter the numbers.

#### DECIMAL KEY

In decimal fractions, this key is used to enter the decimal point in its proper place.

#### CLEARING KEYS

- This key clears all information stored in the calculator including any displaced number, in preparation for a new problem. Returns display to a single zero and decimal point (0.).
- You can use this key to "erase" or clear a number entered by mistake if you use it before touching any of the operation keys. This allows you to correct an entry error during a chain calculation without affecting previous results. Returns display to a single zero and decimal point (0.). (Striking the GE key after terminating a calculation will not affect the display.)

#### OPERATION KEYS

Instructs the calculator to multiply the displayed number by the next numeric entry. During chain calculations it will

simultaneously complete any previous calculation.

- Instructs the calculator to divide the displayed number by the next numeric entry. During chain calculations it will simultaneously complete any previous calculation.
- Instructs the calculator to add the displayed number to the next numeric entry. During chain calculation it will simultaneously complete any previous calculation.
- Use this key to instruct the calculator to subtract the next entry from the displayed number. During chain calculations it will simultaneously complete any previous calculation.
- Use this key to determine percentages or percentage rates as a whole number (rather than in terms of 1/100ths).
- Use this key to automatically obtain the square root of the displayed number. (During chain calculations, first complete the previous calculation with the key and then obtain the square root with the key.)
- This key terminates calculations previously begun (division, multiplication, etc.). It is the operative key when calculating with constants. See pages 10-12 for examples of calculations.

#### NUMERIC AND SYMBOL DISPLAY

Your calculator displays up to 8 digits. The decimal point can be in any of 8 places. A ninth (leftmost) position is not a digit but is used to display a negative number or an OVERFLOW condition:

- This symbol indicates a negative number.
- E This symbol indicates an excessive number of digits has been entered. The numbers displayed will be the most significant digits entered. "Erase" the symbol and entry with the C or CE key.
- This small box indicates a calculation has resulted in an "Overflow", that is, has exceeded the calculator's capabilities. NOTE: The displayed answer will be approximately correct but it will be necessary to mentally "move" the decimal point 8 places to the right. See examples on page 14.

#### FLOATING DECIMAL

Your calculation is equipped with full floating decimal capabilities and will carry results of calculations to the maximum number of places (decimal points) required by the answer, within the unit's 8-digit capacity, It does not round off fractions to the nearest number, but rather

truncates them. For example, 10 -- 6 would display 1.6666666 rather than 1.6666667.

#### CONSTANT FEATURE

An automatic built-in constant allows you to use a constant factor in addition, subtraction, multi-plication, division, and percentage calculations. See examples on pages 10-12.

#### RECIPROCALS

Another feature of this calculator is its ability to obtain reciprocals  $(1/\chi)$ . Enter the number, depress the key, and depress the key twice. See example on page 8.

#### POWERS

Powers of whole numbers may be obtained by entering the number, depressing the key, and then the key. The calculator will now display the square or second power of the number entered. Successive powers are obtained by continuing to depress the key. The exponent may be a positive or negative whole number. See example on Page 13.

#### SIMPLICITY OF ENTRY

Note that entering problems is very easy. You simply enter the problem in the same order as you would write it; for example, 4 2

### SAMPLE CALCULATIONS

	ENTRY	DISPLAY	NOTES
ADDITION 73.50 + 5.14 =	73.5 -+ 5.14	73.5 73.5 5.14 78.64	Not necessary to enter insignificant zeros
SUBTRACTION			
56.0 - 21.37 =	56 21.37	56. 56. 21.37 34.63	Illustrates full floating decimal capability
MULTIPLICATION (1) 704.5 × 6.2 =	C 704.5 × 6.2	704.5 704.5 6.2 4367.9	Insignificant zeros in result not displayed
(2) 5.5 × (-7.2) =	C 5.5 × 7.2	0. 5.5 5.5 5.5 7.2 -39.6	

	ENTRY	DISPLAY	NOTES
DIVISION			
(1) $100 \div 6 =$			
	100	7.750	
	2.00	2.000	
		100.	
	0	10 m m m m m m m	
		10.00000	
(2) $100 \div (-6) =$	C	0.	
	1.00	100.	
		100.	
		1.00:	
	6	6.	
		16.66666	
(3) -100 -: 6 =	C	0.	
		0.	
	100	100	
		100	
	6		
		-16.66666	
MIXED OR CHAIN CALCULATIONS	C	Ω.	
	1.5	1.5	
CONTRACTOR OF THE PERSON OF TH	36	1.5	
$\{(1.5 \times 4) + 3\} -7.4 =$	A	A. A.	Total Research Service
6			key has terminated the
	2	70	$1.5 \times 4$ calculation (=6)
	and the same of th		key has terminated the previous
	0		key has terminated the previous addition step (6 + 3)
	-	1.5	
	1.4	7.4	
		-5.9	

	ENTRY	DISPLAY	NOTES
SQUARE ROOT			
√1.78 =	1.78 \[ \sqrt{\chi} \]	1.78 1.3341664	Answer correct to 7 decimal places
RECIPROCAL			
(1) 1/5 or 1 ÷ 5 =	5	0. 5. 5. 1. 0.2	Intermediate result
(2) 1/0.85 or 1 0.85	.85 	0.85 0.85 0.85 1.1764705	
(3) $\frac{35 \times 12}{75 + 175}$ Problem may be stated: $\frac{1}{75 + 175} \times \frac{35 \times 12}{1}$	C 75 +175 +====================================	0.75. 175. 250. 1. 0.004 0.004 35. 0.14 12. 1.68	

	ENTRY	DISPLAY	NOTES
PERCENTAGE (1) Determine percentage 200.00 Base × 15% Percentage rate Percentage	C 200 × 15 96	200. 200. 200. 15. 30.	% acts as equals key
(2) Discount: Determine net amount after discount 200.00 Base — 10% Discount =	200 200 10 96	200. 200. 10. 20. 180.	Discount Total Cost
(3) Mark-up: Gross profit is a mark-up of base cost (Base + Percentage Rate) 200.00 Base + 15% Percentage rate  Total amount	200 	200. 200. 15. 30. 230.	\$ Mark-up Total Cost
(4) On a base price of \$200.00, the gross profit desired is 10% of the selling price; therefore cost is equal to 90% of selling price. $200 = 90\% (\chi)$ then $\chi = 200$ $90\%$ Where $\chi = \text{Selling Price}$	200 90 96	200. 200. 90. 222.22222	(= \$222.22)

	ENTRY	DISPLAY	NOTES
(5) Finding percentage rate 40 is equal to what percent of 200? 40 = $\chi$ % (200)	C 40 -1- 200 96	40. 40. 200. 20.	(20%)
(6) Mixed percentage 400 items at \$25,00 each less 20% discount (before duty) plus 15% import duty = total cost	C 400 × 25 - 20 % + 15 %	400. 400. 25. 10000. 20. 2000. 15. 1200. 9200.	\$ Discount \$ Before Duty \$ Duty Total Cost
CONSTANT (1) Addend 125 250 212 +25 +25 +25	C 25 -+ 125 = 250 = 212	0. 25. 25. 125. 150. 250. 275. 212. 237.	Enter constant number first

	ENTRY	DISPLAY	NOTES
Minuend (2) 100 100 100 -25 -36 -80	25 25 36 80	100. 100. 25. 75. 36. 64. 80.	Enter constant number first
Subtrahend (3) 125 250 -25 -25	25 	0. 0. 25. -25. 125. 100. 250. 225.	Enter function first Enter constant number next
Multiplier (4)  100 × 2.5 = 125 × 2.5 = (205 × 2.5) × 3 =	2.5 100 125 = 205 = ×	2.5 2.5 100. 250. 125. 312.5 205. 512.5 512.5	Enter constant number first  Illustrates constant factor is updated to 512.5 when     is keyed.

	ENTRY	DISPLAY	NOTES
Divisor (5) 6 156 918	C 6	6.	
3 3 3	3 == 156 == 918	3. 2. 156. 52. 918. 306.	2nd entry in division is constant
Percentage Rate (6) 20% of 150 20% of 200 20% of 300	20 96 × 150 = 200 = 300	0. 20. 0.20 150. 30. 200. 40. 300. 60.	Enter constant number first
Percentage Base (7) 10% of 200 = 15% of 200 = 40% of 200 =	200 × 10 % 15 % 40 %	200. 200. 10. 20. 15. 30. 40. 80.	Enter constant number first

	ENTRY	DISPLAY	NOTES
POWERS			
(1) 16 <sup>n</sup>	C 16 × = = = = = = = = = = = = = = = = = =	0. 16. 16. 256. 4096. 65536. 1048576. 16777216.	1st power 2nd power 3rd power 4th power 5th power 6th power Overflow. See Page 14
(2) 2-3 Problem may be written  1 23	C 2 X ==	0. 2. 4. 8. 8. 1. 0.125	1st Power 2nd Power 3rd Power
CLEARING (Use of CE)			
(1) 1.12 +3.33 +4.13	1.12 	1.12 1.12 3.33 4.45 4.4 0. 4.13 8.58	Error in entry (Previous results still maintained)

	ENTRY	DISPLAY	NOTES
OVERFLOW Entry overflow 123456789	C 123456789	E12345678.	Last digit not displayed
Resultant overflow: 12345678 × 9 =	C 12345678 × 9	12345678. 12345678. 12111110	
Resultant Approximation with Overflow 98765432 × 9 =	98765432 × 9	98765432. 98765432. 9. 1 8.88888888	Mentally "move" decimal point 8 points to right for approximate result of 888888880. (Correct result is actually 888888888.)
MISOPERATION 2 0 =	C 2	0. 2. 2. 130.	

#### MAINTAINING CALCULATOR

Cleaning

Case may be cleaned with alcohol. Display window may be cleaned with glass cleaner.

Storage

Unit should not be exposed for any prolonged period to temperatures below -40°F or above 150°F (these temperatures might be encountered in a closed automobile, for example).

#### TROUBLE SHOOTING

If a problem occurs, verify that the power switch is "ON" (slide switch pushed toward AC Adaptor -see Fig. 1).

Symptom	Power	Remedy
No Display	Battery	Check or replace batteries; observe correct polarity
Weak Display	Battery	Check or replace batteries; observe correct polarity
No Display	AC	AC/DC adaptor is plugged into a proper outlet
Display Lit But Result Incorrect	Either	Review operating instructions

If the remedies suggested do not cure the prob-

lem, refer to your service certificate for instructions.

NOTE: Batteries are not guaranteed by the calculator manufacturer. Also note that "AA" type batteries must not be returned if unit is returned for servicing.

POWER

An AC adaptor is supplied with 0311 models for your hand-held calculator from a standard 115 VAC wall outlet.

(AC adaptor is not included in 0310 models but may be ordered separately.)

Batteries will have a longer life if you turn off calculator when not in use and if you will "clear" the calculator with the E after obtaining calculation results.

TO REPLACE BATTERIES

(Models 0310 and 0311) Your unit is shipped with four 'AA' batteries. They are readily accessible by removing the battery cover on the bottom of the calculator case. Push the battery latch cover in the direction away from the label on the back of the case, and remove the cover. Remove old batteries and replace new ones according to the battery outline in the battery compartment. This will insure correct polarity of batteries. Failure to properly install the batteries will result in failure of the calculator to operate.

Batteries which may be used in your calculator 15 include but are not necessarily limited to the

following:

Company	Carbon Zinc	Alkaline
Eveready	815, 915, 1015	E-91
Mallory	M15R	MN-1500, SA15AA
Panasonic	UM-3, UM-3D, UM-3N	AM-3
Ray-O-Vac	5AA. 7AA NIT IS EQUIPPE	815 D WITH
		IES (MODEL 0312)
Owners of u	nits powered by	nickel-cadmium bat- llowing precautions:
		than 12 hours with-
out rech	arging. (If unit is	operated for longer
(2) Dechar	battery life may	r 12 hours, using
	supplied with un	
	calculator to OF	
		o calculator and the
char	ger into any con	venient AC outlet
NOTE: The	unit can be c	perated while the
charger is "	plugged in" to a	n AC outlet, but this
		g circuit and charg-
ing will not	cocur during c	alculator operation.
The unit is	protected again	ist accidental over-
charge of b		
	admium Battery	
		rformed only by an
	service center.	(See Service Cer-
tificate.)		
GLOSSARY		
	ARITHMETIC T	CHING

11.	Multiplication	Multiplicand (1st factor) Multiplier (2nd factor)	25 × 6
		Result (Product)	150
HI.	Division	Dividend Divisor	150
		Result (Quotient)	25
IV.	Addition	Augend Addend	100
	OTHER	Result (Sum) COMMON TERMS	125

hundred") Symbolized by "%". Thus 7% means 7 parts of 100 parts or 0.07 (7/100) of the whole.

The percent key 96 on your calculator computes percentages, percentage rates and percent bases automatically, including proper placement of the decimal point.

Constant: A quantity or factor in a calculation that remains the same in a series of similar calculations.

Square and power: The square of a number is the result of that number multiplied by itself or the 'second power', for example 12 × 12 =(12) == 144. Your calculator can automatically perform the squaring function or raise to higher powers, e.g. 3' or 3' (see page 12 for examples).

I. Subtraction	Minuend Subtrahend	100
	Result (Difference)	75